



crealco

RESISTANCE™



SECURE HIGH PERFORMANCE WINDOW



Crealco Resistance™ Patented RSA Pat. Appln.No. 2018/05396
Crealco Resistance™ RSA Registered Design No. F2018/01258

A product of

WISPECO
Aluminium



FEATURES

- Available with Top Hung and/or Side Hung sashes.
- Multi-locking point option.
- Improved drainage.
- Meets SANS 613 standard.

GLAZING

- Improved secure glazing bead.
- 4mm - 24mm thick Glazing.

GASKETS & SEALS

- Standard Crealco colour coded wedges.
- Y-Seal on sashes for improved sealing.

FINISH

- Available in anodized and approved Crealco powder coat colours.

HARDWARE

- Approved Crealco friction stays.
- Approved Crealco window handles.







• Detail showing the standard sash and handle with single glazing.



• Detail showing the double locking point sash and handle with double glazing.

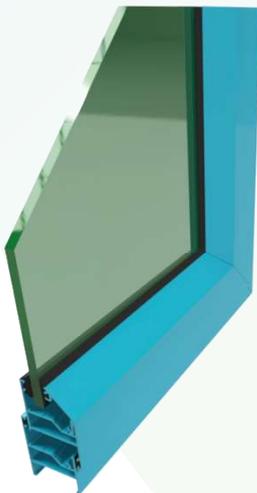

• Typical detail with single glazing & the angled bead.

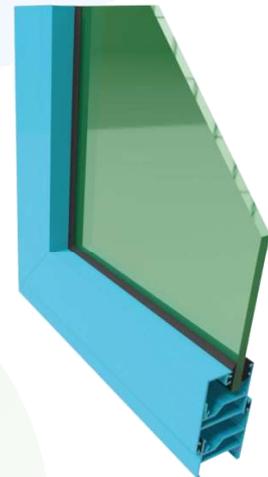

• Typical detail with single glazing & the square bead.





TEST RESULTS



MECHANICAL PERFORMANCE TEST RESULTS - SANS 613

DESCRIPTION	RESULTS
NEGATIVE PRESSURE	Passed 2500 Pa
POSITIVE PRESSURE	Passed 2500 Pa
WATER PENETRATION	Passed 500 Pa
STRUCTURAL	Passed 3750 Pa

TEST RESULTS



crealco Windows	HOME	MANSION	MALL	TOWER
Swift 28 window	✓			
Swift 30.5 window	✓			
Resistance window	✓	✓	✓	
Swift 34 window		✓	✓	
Swift 36 window		✓	✓	✓
Clipp 44 window			✓	
Edge thermal break window		✓	✓	✓
Serene window		✓	✓	✓



Crealco Resistance™ Patented RSA Pat. Appl.No. 2018/05396
Crealco Resistance™ RSA Registered Design No. F2018/01258

To find your nearest Crealco Distribution Partner , please visit the Crealco website at :

www.crealco.co.za

Disclaimer : The right to make alterations is reserved This brochure must be in conjunction with the Installation , Cleaning & Maintenance Guidelines for the relevant system.
 This manuals must also be used in conjunction with the design and cutting lists from the latest version of Starfront.